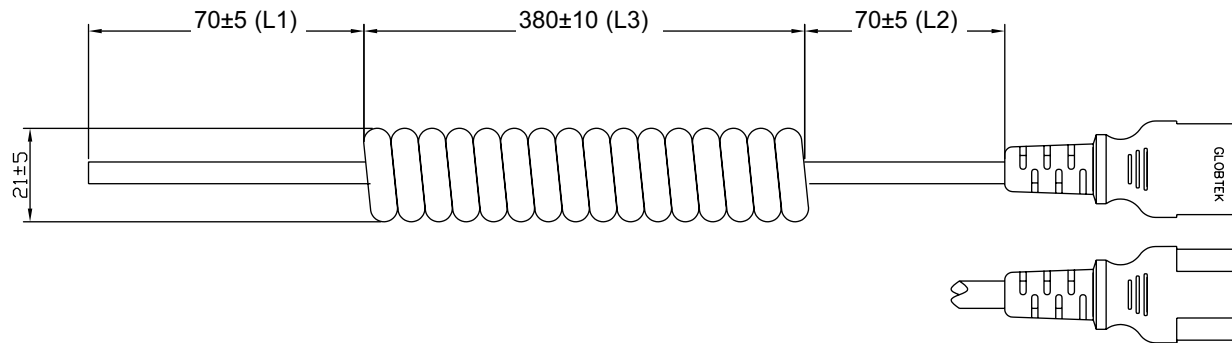



PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 9394, GC	09/26/06	BS

'B'

'A'

GENERAL SPECIFICATIONS:

RATING:	250V / 10A
CABLE TYPE / SIZE:	H05VV-F, 3 x 1 mm ²
TEMPERATURE RATING:	70°C
CABLE JACKET COLOR:	BLACK
CONDUCTOR COLOR:	BROWN/ BLUE/GREEN-YELLOW
EXTENDED LENGTH :	1600 ± 50 mm
RETRACTED LENGTH (L3):	380 ± 10 mm
LENGTH (L1, L2):	70 ± 5 mm
RETRACTED OD:	Ø 21 ± 5 mm
CABLE OD:	Ø 7.0 ± 1 mm
END 'A' TERMINATION:	IEC-320 / C13
END 'B' TERMINATION:	CUT BLUNT
APPROVALS CABLE:	N/A

PACKING:
BULK PACKED

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: GC		DATE: 09/26/06	GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
DRAWN: NF		DATE: 09/26/06	DWG TITLE: RETRACTICLE CORDSET	
APRVD: HM		DATE: 09/26/06	PART NO: 701527ASC	
		SCALE: NONE	REV. A SHEET 1/1	

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult the applicable UL/CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice